


Terminus GSM Demo Guide

Serial to GPRS Bridge

Issue: R01

Instruction Demo Guide for Terminus Serial to GPRS Bridge

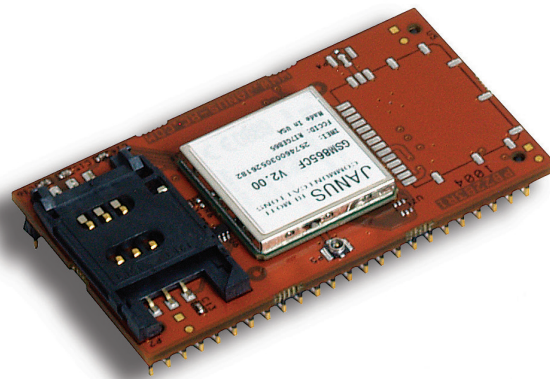

JANUS REMOTE
COMMUNICATIONS

Thomas Heck
Janus Remote Communications
May 2010

Bulletin	JA01-DG-SGPRS
Revision	01
Date	17 May 2010

Terminus GSM Demo Guide - Serial to GPRS Bridge

This document includes all information needed to successfully alter, compile, download and run the Terminus Serial to GPRS Bridge Demonstration. You may need to alter the demonstration, as well as configure your server to match your specific settings.

Relevant Telit Documentation for the application includes:

- Telit AT Commands Reference Guide
- Telit Easy Script in Python
- Telit GC864 Software User Guide

All can be accessed via Telit's website at www.telit.com

This document can be used to run the Terminus Serial to GPRS Bridge Demonstration for both the Terminus GSM864Q modules and the Terminus GSM865CF modules.

Terminus Serial to GPRS Bridge Demonstration contents:

Terminus_Serial_to_GPRS_Demo_v2.zip

- 1.1. Python Scripts
 - 1.1.1. TerminusS2G.py
 - 1.1.2. JANUS_SER.py
 - 1.1.3. ATC.py
 - 1.1.4. NETWORK
 - 1.1.5. GPRS.py
 - 1.1.6. timers.py
 - 1.1.7. exceptions.py
- 1.2. Terminus Serial to GPRS Bridge Demonstration Guide.pdf
- 1.3. Netcat application
- 1.4. Realterm application

Terminus Serial to GPRS Bridge demonstration requirements:

1. Personal Computer (**The Development Computer**)
 - 1.1. Windows OS (WINXP, 2000)
 - 1.2. Internal Serial Port (DB9 Connector)
 - 1.3. Pythonwin IDE installed
 - 1.4. Realterm installed
2. Personal Computer (**The Customer Server**)
 - 2.1. Windows OS (WINXP, 2000 or NT4)
 - 2.2. Connected to Internet
 - 2.3. Firewall to allow TCP/IP socket connections to PORT 5556
 - 2.4. Netcat installed

1 Getting Started –

The Development Computer

1.1 Installing Terminus Serial to GPRS Bridge Demonstration

- Unzip the contents of the `Terminus_Serial_GPRS_Bridge_Demo_v2.zip` file to a local drive on the Development Computer. The zip file can be downloaded from www.janus-rc.com

1.2 Installing Pythonwin IDE

- Install the Pythonwin IDE per the instructions in the GSM864Q Terminus User guide.
- Once the IDE is installed and configured, open the `TerminusS2G.py` script.

1.3 Installing Realterm

- Install Realterm application and follow installation instructions.

1.4 Customizing Demonstration Properties


In order to evaluate the Terminus Serial to GPRS Bridge demonstration, the customer **must** customize the following properties in the `TerminusS2G.py` file.

► Python Script


```
##-----  
## Application Specific Configuration  
##-----  
  
## BAND  
## Please refer to AT Command guide for AT#BND  
## If Terminal used in North America (BAND = '3')  
myApp.BAND = '3'  
  
## NETWORK  
## If Terminal used on ATT / Cingular in North America (NETWORK = 'ATT')  
## Else (NETWORK = 'GSM')  
myApp.NETWORK = 'GSM'  
  
## APN  
## Gateway Address for GPRS traffic  
## This setting is GSM Provider and possible customer specific when a VPN is used  
## This demo is defaulted with 'internet' that is used for ATT wireless settings from pre-Cingular days  
## You MUST obtain the APN setting for your GSM account. Please call GSM provider! Janus can't help you with this.  
myApp.APN = 'YOUR NETWORKS APN'  
  
## IP  
## IP address of server on the Internet which Terminus will connect to send and receive data  
## Address in this example is not operational for customer evaluation. Customer must have their own server  
## setup to interact with this demo.  
myApp.IP = 'YOUR SERVERS IP ADDRESS'  
  
## PORT  
## PORT number of server on the Internet which Terminus will connect to send and receive data  
## PORT number in this example is not operational for customer evaluation. Customer must have their own server  
## setup to interact with this demo.  
myApp.PORT = '5556'  
  
## PROTOCOL  
## If customer is using TCPIP (PROTOCOL = 'TCPIP')  
## Else leave blank (PROTOCOL = '')  
myApp.PROTOCOL = 'TCPIP'  
  
## GPRS USER NAME  
## If GSM Provider requires GPRS User Name (USERNAME = 'JOE')  
## Else leave blank (USERNAME = '')  
myApp.USERNAME = ''  
  
## GPRS PASSWORD  
## If GSM Provider requires GPRS Password (PASSWORD = 'JOE123')  
## Else leave blank (PASSWORD = '')  
myApp.PASSWORD = ''
```

1.5 Compiling Python Scripts

- ▶ Open the directory that contains the Terminus Serial to GPRS Bridge demonstration scripts with explorer.exe.

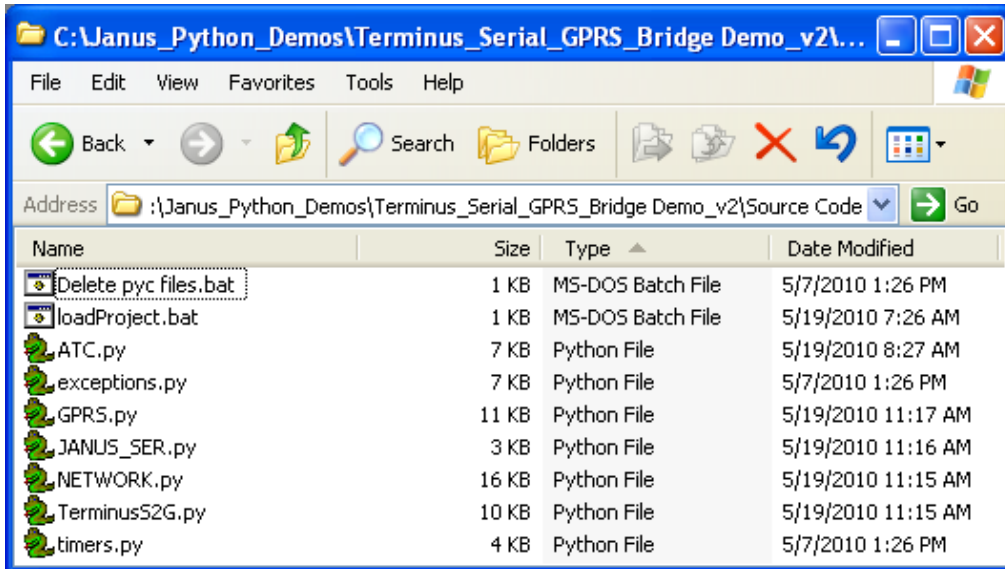


- ▶ Right click on all the python scripts and select compile.

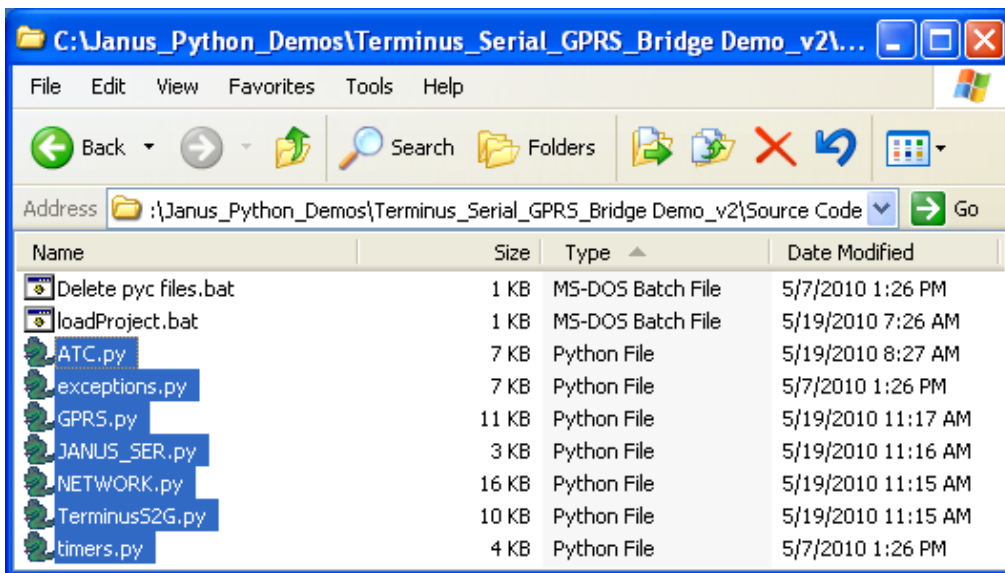


- All files should compile and additional files should exist with *.pyo extension.
- Move these files to the directory named Deployment.

1.6 Downloading Python Scripts to Terminus

- ▶ Connect the Terminus serial port (DB9 connector) to the development computer serial port. The serial port of the development computer should be the serial port configured as the MDM interface in the Telit COM Port Selection Tool. Refer to the Terminus GSM864Q User Manual under Installing Pythonwin IDE for more information.
- ▶ Open the directory that contains the Terminus Serial to GPRS Bridge demonstration compiled scripts with explorer.exe.

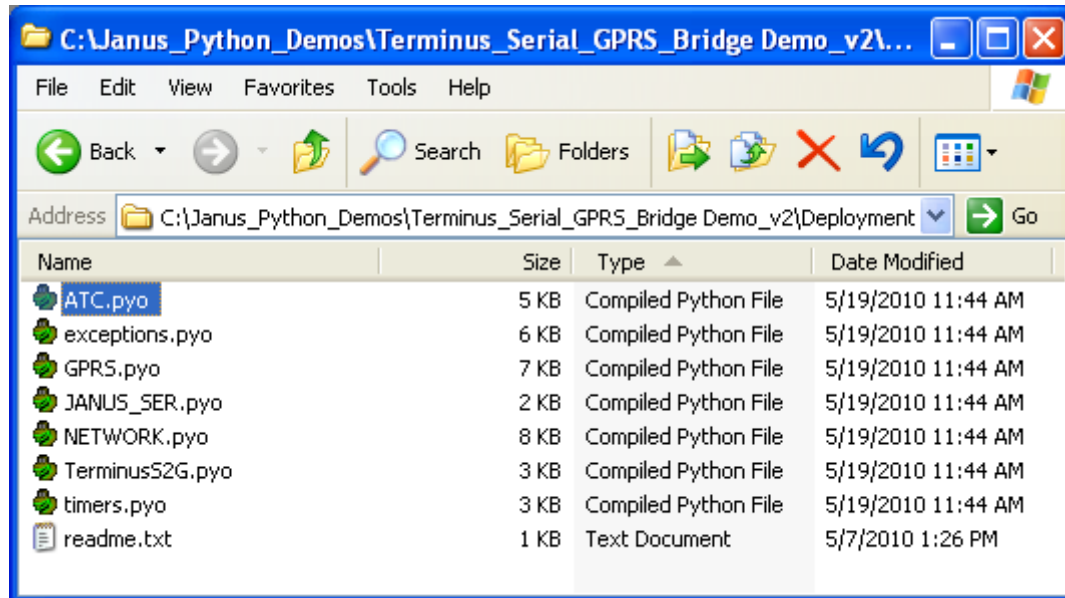

- ▶ Right click download for each file in the Deployment directory.

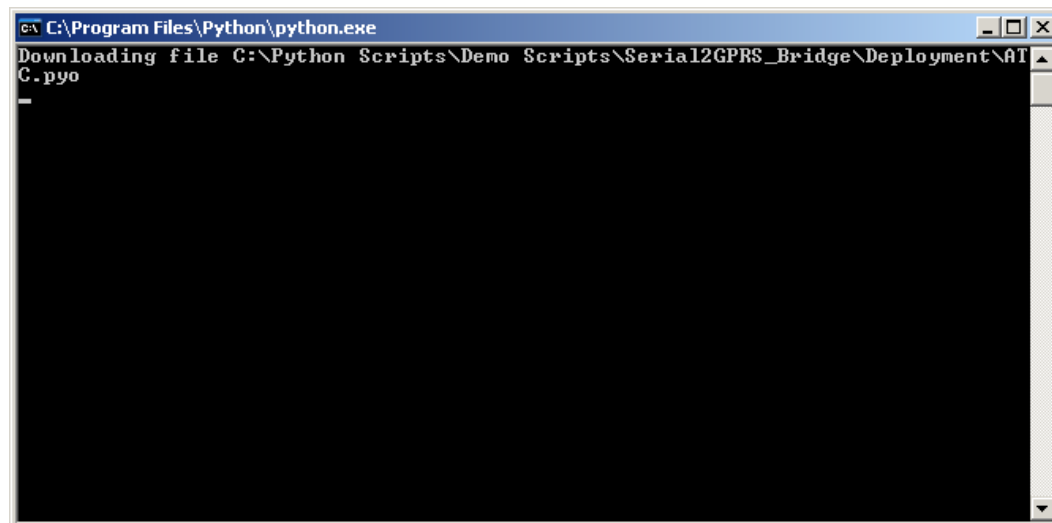

1.7 Enable Terminus Serial to GPRS Bridge Demonstration to Execute on Power On


- ▶ Disconnect power from the Terminus. Open Realterm, and select the 'Port' tab. Select the following serial port parameters:

Baud: 115200
Port: Your PC's Port #
Parity: None
Data Bits: 8
Stop Bits: 1
Hardware Flow Control: None

- ▶ Apply power to the Terminus.
- ▶ Open the serial port and send the following commands.

AT#STARTMODESCR=1,10

AT#ESCRIP="TerminusS2G.pyo"

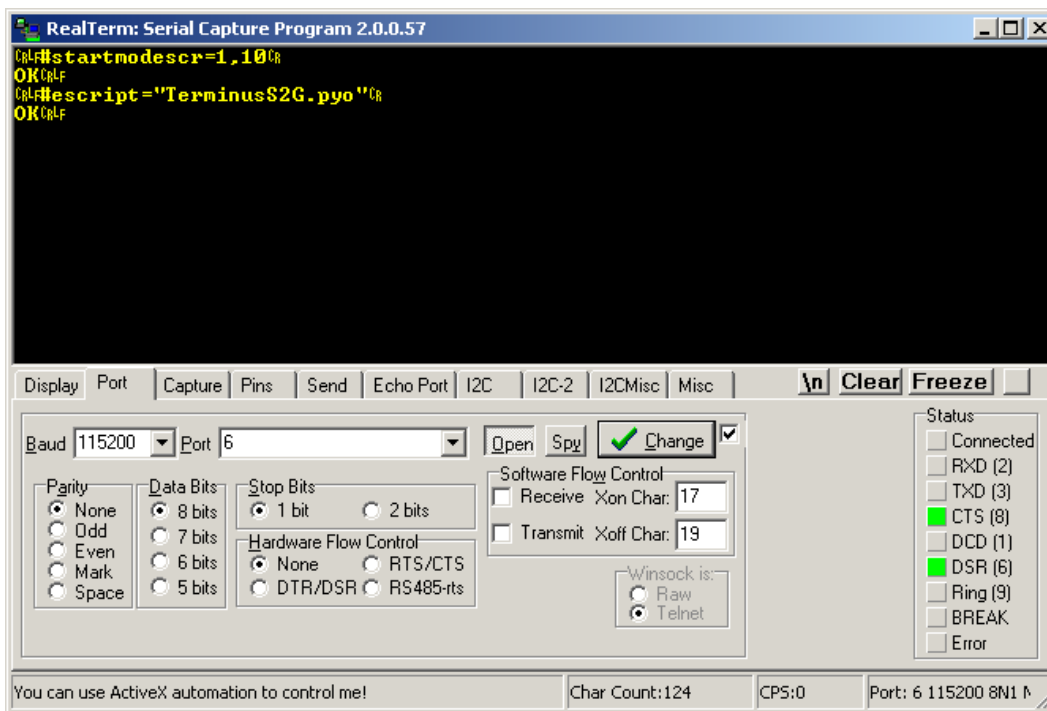


2 Getting Started –


The Server Computer

2.1 Installing Netcat on the Server Computer

- ▶ Copy the directory netcat and all files to the following directory on the Server Computer. C:\netcat.
- ▶ Open the command prompt.

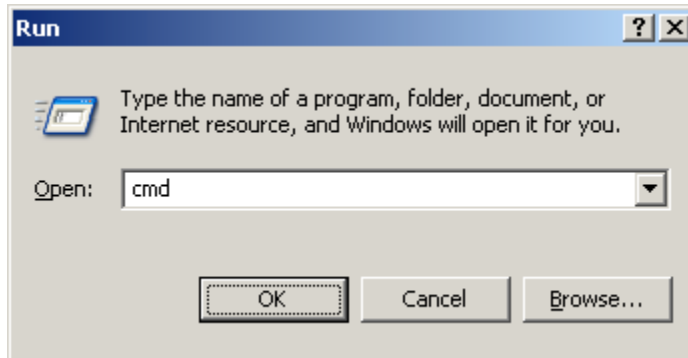

- ▶ Execute the following commands.

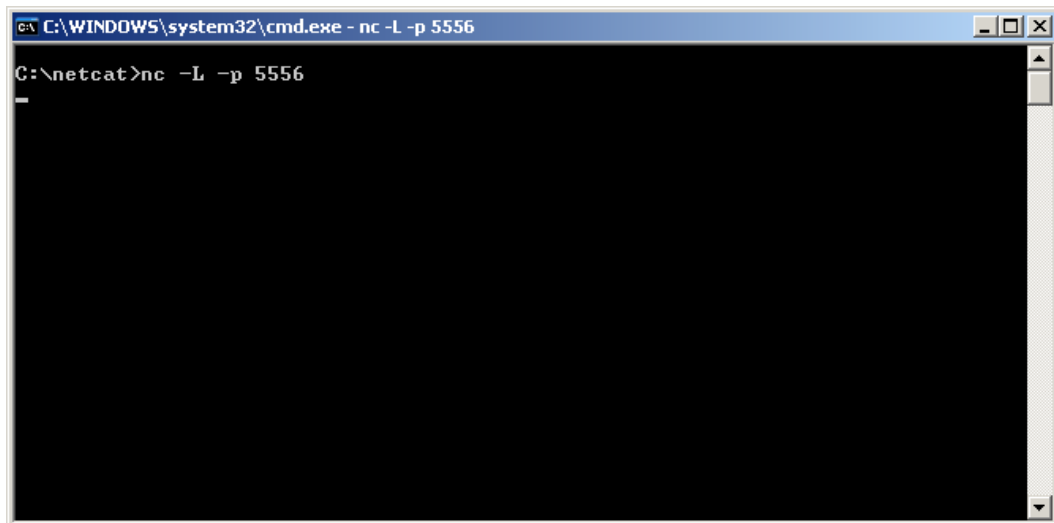


Note: The Server Computer must be connected to the Internet and able to accept TCP/IP socket connections to the PORT defined in the TerminusS2G.py script. Please make sure the firewall is configured to allow this type of network traffic. If behind a wireless router you will need to specify routes to the Server Computer. Please call your IT professional to make sure your computer and network has the correct configuration for this. Janus cannot help you with your network settings.


3 Getting Started –

Running the Demonstration

- ▶ Remove power from the Terminus.
- ▶ Connect GSM antenna to SMA connector of the Terminus.
- ▶ Reapply power to the Terminus.
- ▶ Wait for the DCD light in Realterm to turn green or for CONNECT to display. When DCD is active the Terminus will have an open socket connection to your server (Netcat application).
- ▶ Type 'Hello Netcat!' in terminal window.

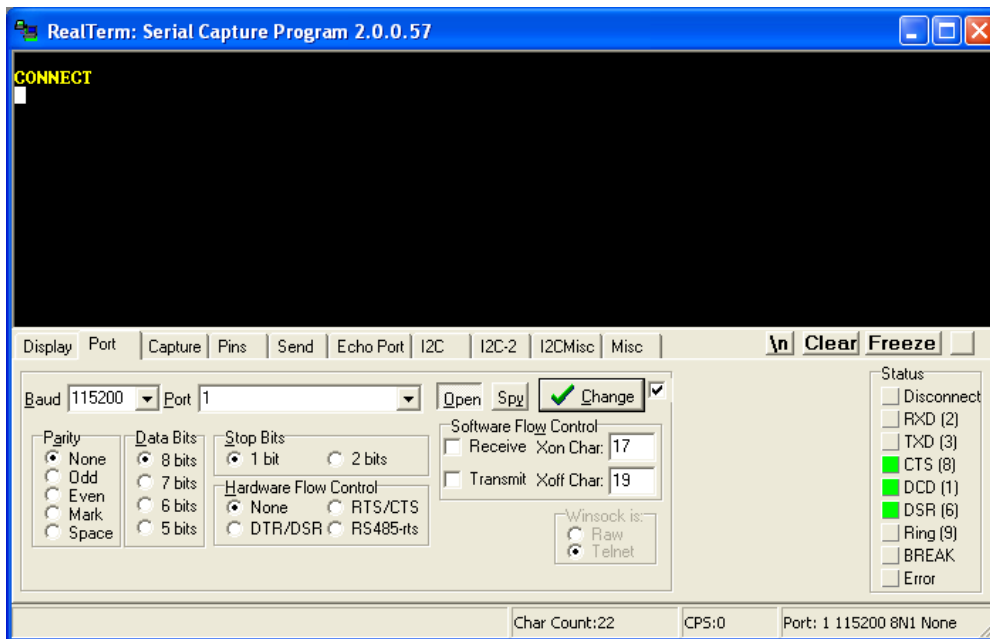

- ▶ On the Server Computer you should see data appear in netcat session

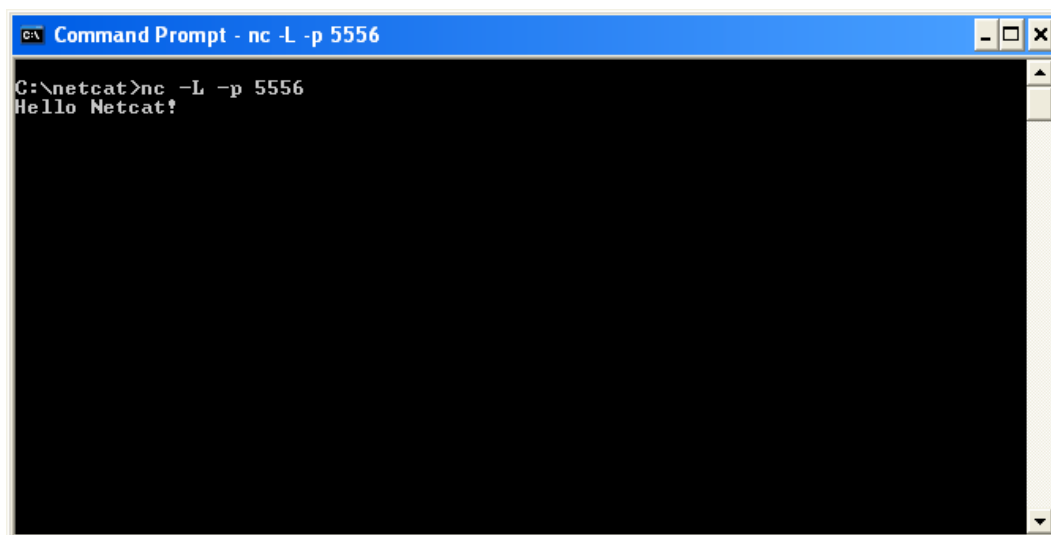

- ▶ No Carrier will display when socket connection is closed

4 Getting Started –

Debugging Demonstration

The following causes of the Terminus Serial to GPRS Bridge demonstration failing to transmit TCP/IP socket data to Server Computer are as follows:

Cause	Resolution
SIM card not provisioned for GPRS services.	Call your GSM provider and ask for this service.
APN not configured for your GSM provider and/or account type	Call your GSM provider and ask for APN settings for your account type.
Server not connected to Internet	Call your IT professional. Janus is unable to help configure your network settings
Server firewall blocking TCP/IP traffic at configured PORT. See TerminusS2G.py file.	Call your IT professional. Janus is unable to help configure your network settings
Server computer behind a router that doesn't have routes setup to the server.	Call your IT professional. Janus is unable to help configure your network settings

Appendix A – Terminus Serial to GPRS Bridge Demonstration Python Scripts

Python Scripts included in the Terminus Serial to GPRS Bridge Demonstration

Script File Name	Script Description	Script Author
TerminusS2G.py	Main script that will need to be enabled to run on power-on.	Janus RC
JANUS_SER.py	Script contains methods to send and receive data from the Terminus serial port	Janus RC
ATC.py	Script contains methods and properties that relate to the sending and receiving of AT commands.	Janus RC
NETWORK.py	Script contains methods and properties that relate to GSM network configuration.	Janus RC
GPRS.py	Script contains methods and properties that relate to sending and receiving GPRS data.	Janus RC
timers.py	Script contains methods and properties to implement timer routine.	Telit
exceptions.py	Script contains exception handling methods	Telit

Terminus GSM Demo Guide

Serial to GPRS Bridge

Thomas Heck
Janus Remote Communications
May 2010

Janus Remote Communications

Division of The Connor-Winfield Corporation
2111 Comprehensive Drive • Aurora, Illinois 60505
630.499.2121 • Fax: 630.851.5040

www.janus-rc.com