

Standard Terminus



Engineered for *any* M2M Application

Quad Band GSM/GPRS Terminals – Optional GPS


- PTCRB and Carrier Certified
- 7 to 18 Vdc
- Accessible SIM Holder
- Nine User-Configurable CMOS GPIOs

Standard CDMA Terminal

- Sprint and Verizon Certified
- 7 to 26 Vdc
- Embedded GPS
- Seven User-Configurable CMOS GPIOs

Coming Soon!

2nd Generation Standard Terminus: Microcontroller, Accelerometer, Two 4-20mA Current Loops. Based on our Plug-In Modems

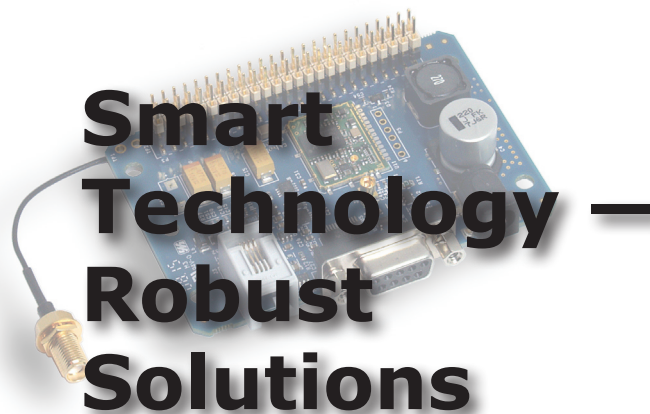

JANUS REMOTE
COMMUNICATIONS

Visit www.janus-rc.com
or call 630-499-2121

