

JANUS REMOTE COMMUNICATIONS

Terminus Plug-In Series GSM865CF Terminal Modem

Description


The Terminus Plug-In series of products are plug-in communication modems specifically designed for wireless M2M applications. Their multi-band design enables worldwide development of applications.

The Plug-In Terminus products allow users the option to change network and user configurability as technology and communication needs change. Three communication options, GSM, CDMA and UMTS are available within one common board layout. Each unit will be a certified end product with a power supply and 5.0V operation. The GSM and UMTS modems will also include a SIM Card socket. To allow for easy integration, this terminal is available in an open frame option only.

The Terminus GSM865CF is the GSM communication modem of the Plug-In series. This 2.5G modem provides M2M communication over GSM networks.

GSM865CF Features

- Quad-band EGSM 850 / 900 / 1800 / 1900 MHz
- GSM/GPRS protocol stack 3GPP Release 4 compliant
- Control via AT commands according to 3GPP 27.005, 27.007 and Telit custom
- Control via remote AT commands
- Serial port multiplexer 3GPP 27.010
- SIM application toolkit 3GPP TS 51.014
- SIM access profile
- TCP/IP stack access via AT commands
- Over-the-Air firmware management
- Voice and SMS (MO / MT)
- Output power
 - Class 4 (2W) @ 850 / 900 MHz
 - Class 1 (1W) @ 1800 / 1900 MHz
- Sensitivity:
 - ≤ -107 dBm @ 850 / 900 MHz
 - ≤ -106 dBm @ 1800 / 1900 MHz
- DARP/SAIC support
- Dimensions: 2.5" x 1.4" x 0.365"
- Operational temperature range (without GPS): -40°C to 80°C
- Operational temperature range (GPS configured): -30°C to 65°C
- Internal LDO regulator
 - Input voltage range: 4.75 to 5.25Vdc (5.0Vdc Nominal)
 - Supply disable via terminal input pin
- SIM Card
 - Standard locking SIM card socket
 - Or, optional SIM on a chip
- GSM and GPS available via Murata GSC miniature RF connector
- GPS
 - Stand alone GPS available at terminal pin interface
 - Dedicated GPS antenna connection with active antenna support

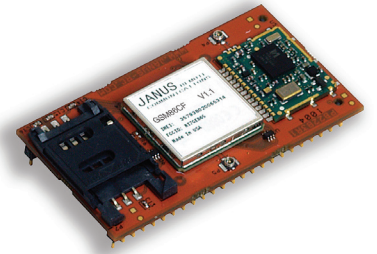

Applications

Suitable for all M2M Applications

- Fleet Management
- Asset Tracking
- Security Systems
- Telemetry
- Telematics & Telecontrol
- Remote Monitoring Systems
- Remote Meter Reading
- Vending Machines

Terminus Models & Ordering


Ordering	Description
GSM865CF V1.1	Terminus GSM Plug-In Modem - GPS enabled
GSM865CF V2.00	Terminus GSM Plug-In Modem - without GPS
Additional Plug-In Products	
CDMA864CF V2.00	Terminus CDMA Plug-In Modem - Sprint Certified
CDMA864CF V3.00	Terminus CDMA Plug-In Modem - Verizon Certified
UMTS864CF V1.00	Terminus UMTS Plug-In Modem

2111 Comprehensive Drive
Aurora, Illinois 60505
630.499.2121
Fax: 630.851.5040
www.janus-rc.com


Bulletin **JA03-PB_GSM**
Revision **P03**
Date **10 Nov 2011**



Making machines talk.

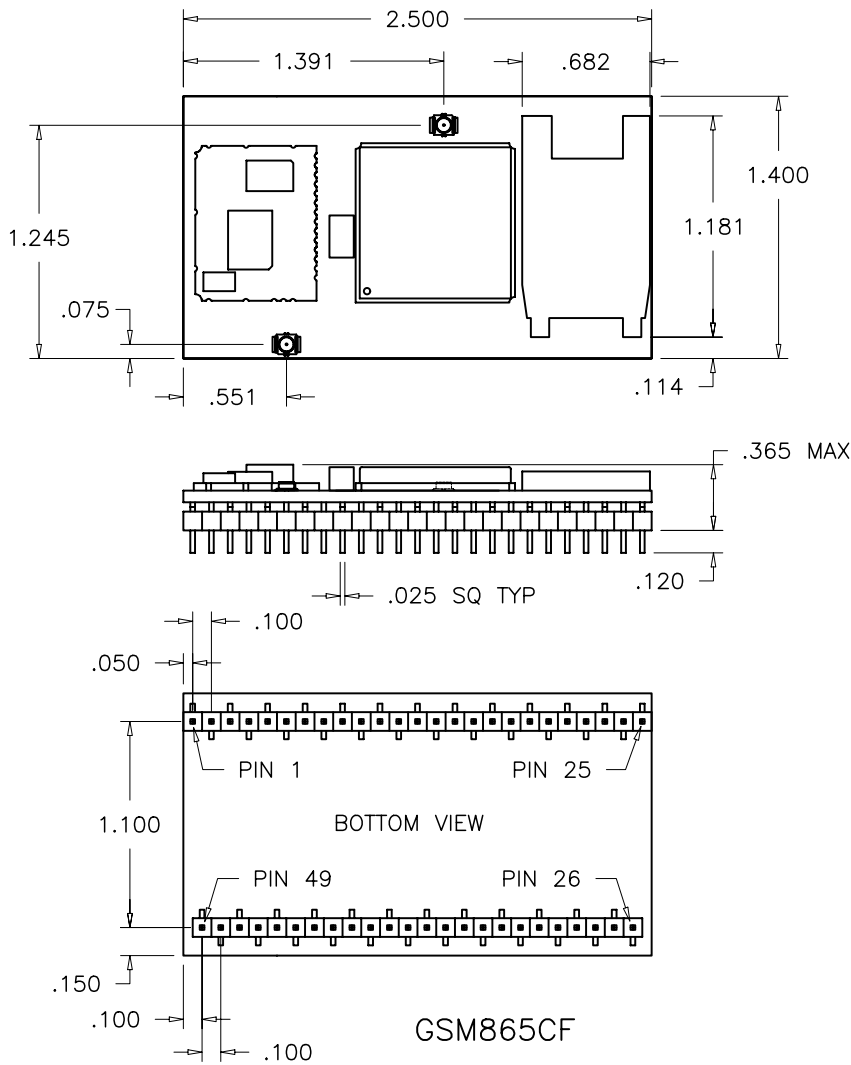

GSM865CF Mechanical Drawing

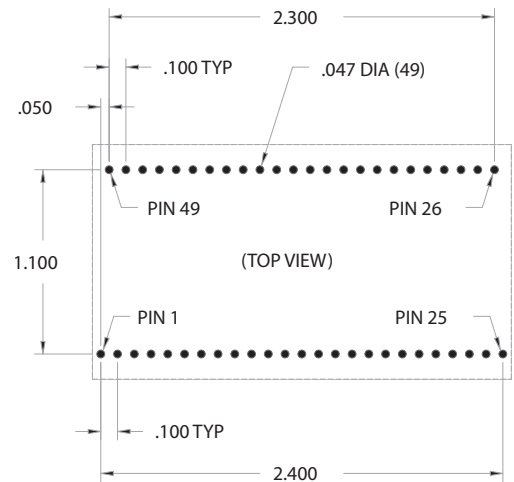

Terminus Plug-In

JANUS REMOTE
C ● M M U N I C A T I O N S ● S

Division of The Connor-Winfield Corporation
2111 Comprehensive Drive • Aurora, Illinois 60505
630.499.2121 • Fax: 630.851.5040

www.janus-rc.com



Making machines talk.

Janus Remote Communications Europe

Bay 143
Shannon Industrial Estate
Shannon, Co. Clare, Ireland
Phone: +353 61 475 666