


Verizon Activation Notes for Janus POTSwap™

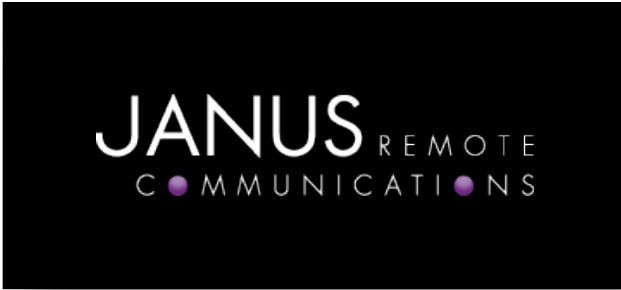

Janus - Your POTS Replacement Champion!

Verizon Device Name: **POTSwap™**

<https://opendevelopment.verizonwireless.com/device-showcase/device/10981>

Give this document to your Verizon Rep and have them confirm the following requirements for activation:

- **Machine to Machine Plans** (Do not use fixed plans)
Plans **must** be provisioned with Offer Development before activation. Share Group 1 & 2, custom m2m plans require DACC codes to be built for Janus POTSwap GPO.
Janus Recommends 50MB plan and voice minutes as needed.
- **Required SFO for Voice**
81143 Access Advanced Calling
81186 Access HD Voice
81158 HD Voice
68872 Call Delivery
73733 Decline Voicemail
54307 Block Text Messaging
Critical Remove any voice blocks - This is a VoLTE device, requiring minutes for voice calls.
- **Voice Minutes** – The LTE910PS is a VoLTE voice device. Choose a plan that supports voice minutes suitable for your application.
- **Sim Cards** – Standard CAT1 Triple Punch (Rugged Micro 3FF also supported)

Activation Support: Verizon IoT Technical Support | Tier II – 800.525.0481

- You must provide **MTN** of **POTSwap device**
- Verify required SFOs are applied to each active line



Bill Borton, General Manager
Janus Remote Communications
630-499-2121 | bborton@janus-rc.com

